


BILL OF MATERIALS

- CONCRETE
- VAT FOR HORSES 66 SACKS OF CEMENT, 5 CU. YDS. SAND, 10 CU. YDS. GRAVEL.
- VAT FOR CATTLE: 54 " " " 4 " " " 8 " " "
- 7- LINEAR FEET OF 2" GALVANIZED PIPE, SUMP DRAIN.
- 4- 2" ELBOWS
- 3- WIRE STRAINERS FOR DRAINS AND SUMPS.
- 4- 2"x6"x14" SILLS.
- 5- 4"x6"x10" POSTS.
- 2- 2"x2"x14" SPLASH BOARDS.
- 8- 2"x6"x14" RAILS.
- 2- 2"x4"x10" FOR CLEATS.
- 18- 1/2"x7" BOLTS FOR CLEATS.
- 10- 5/8"x12" ANCHOR BOLTS.
- 1- DRAIN PLUG.

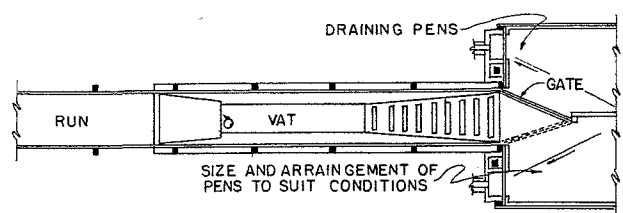

LSU AgCenter
Research & Extension

DIPPING VAT

ENGINEER	SCALE 1" = 2'-0"
DRAWN BY	SHEET 1 OF 1
TRACED BY	DATE
	NO. 24-6

Disclaimer

This site makes available conceptual plans that can be helpful in developing building layouts and selecting equipment for various agricultural applications. These plans do not necessarily represent the most current technology or construction codes. They are not construction plans and do not replace the need for competent design assistance in developing safe, legal and well-functioning agricultural building system. The LSU Agriculture Center, the Mid-West Plan Service, the United States Department of Agriculture and none of the cooperating land-grant universities warranty these plans.